


Flaring Tool




45° Eccentric design

Precise positioning

Patented annular Rivet connection

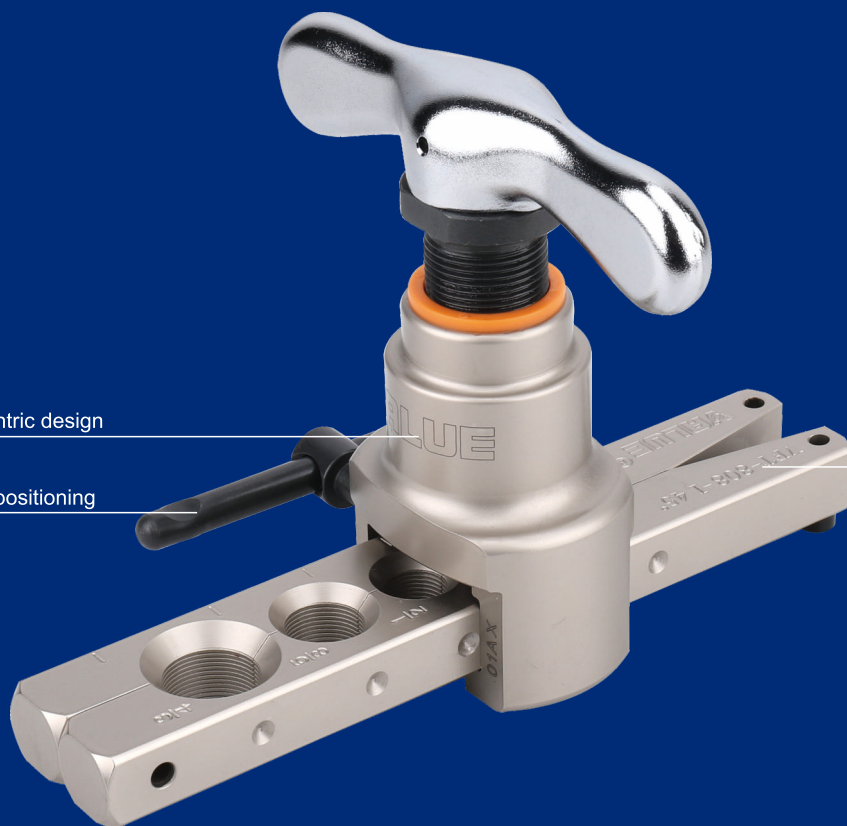

Usage method of quick-clamp

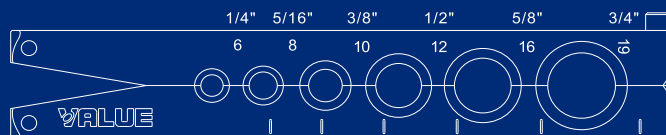

Accurate Flaring

Annular Rivet Connection

- Precise of flared

45° Eccentric design

- Point contact flare, standard dimension, easy to use

| Model | Tubing O.D. | Accessory | Packaging |
|---------------|--|-----------|-----------------|
| VFT-808L-IN | 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" | / | Blister packing |
| VFT-808L-I | 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" | / | Blow case |
| VFT-808L-I-02 | 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" | / | Carton |
| VFT-808L-MI | 6, 8, 10, 12, 16, 19 mm 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" | / | Blow case |
| VFT-808L-IS | 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" | VTC-32 | Blow case |
| VFT-808L-MIS | 6, 8, 10, 12, 16, 19 mm 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" | VTC-32 | Blow case |