


Refrigerant Hose




3-layer anti-seeping refrigerant hose

Pure copper connector

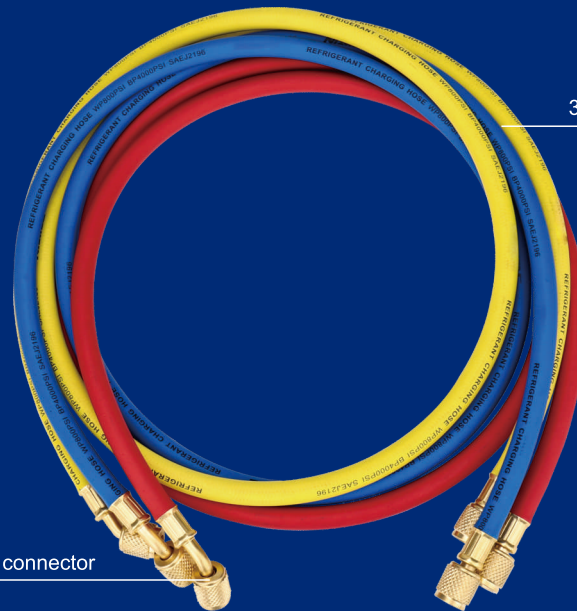

Check Valve

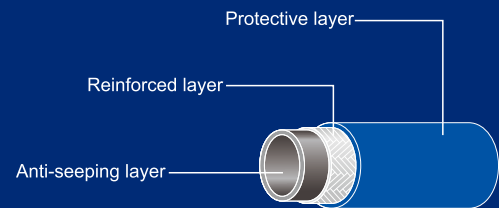

High strength

Wide Range of Application

- It's suit for R410A, R134a, R22, etc

Safe and Reliable

- Rubber tube reinforced thickness 12mm, Ensure safe and reliable using

High Oil-resistance, Anti-seep

- 3 layer reinforce refrigerant tube, Effective avoid seeping
- Pure copper connector, Longitudinal die-casting

Check Valve

- Effectively complete the pipeline switching

Model	R410A	R134a
Working pressure	0 ~ 800 psi	0~500 psi
VRP-U-R	1/4"-5/16"	1/4"-1/4"
VRP-U-Y	1/4"-1/4"	1/4"-1/4"
VRP-U-B	1/4"-5/16"	1/4"-1/4"
Length	90 cm 120 cm 150 cm	

Model	R410A	R134a, R22, R12	R134a, R22, R12
Working pressure	0~800 psi	0~500 psi	0~500 psi
VRP-C-R	1/4"-5/16"	1/4"-1/4"	1/2" M14x1.5
VRP-C-Y	1/4"-1/4"	1/4"-1/4"	1/2" -1/2"
VRP-C-B	1/4"-5/16"	1/4"-1/4"	1/2" M14x1.5
Length	90 cm 120 cm 150 cm		